



Quanex

Schlegel

GIESSE

REGUITTI

DATEC

VISITOR GUIDE

quanex.com

BAU 2025
January 13-17

BAU


Quanex



A Part of Something BiggerSM

INDEX

- 1 HI-ZENITH
- 2 PROJECT SMART CHIC
- 3 CHIC 200
- 4 CHIC DOOR ALU16
- 5 PROXIMA
- 6 CHIC DOOR 200 180°
- 7 SCHLEGEL
- 8 REGUITTI
- 9 REGUITTI INOX
- 10 JATEC

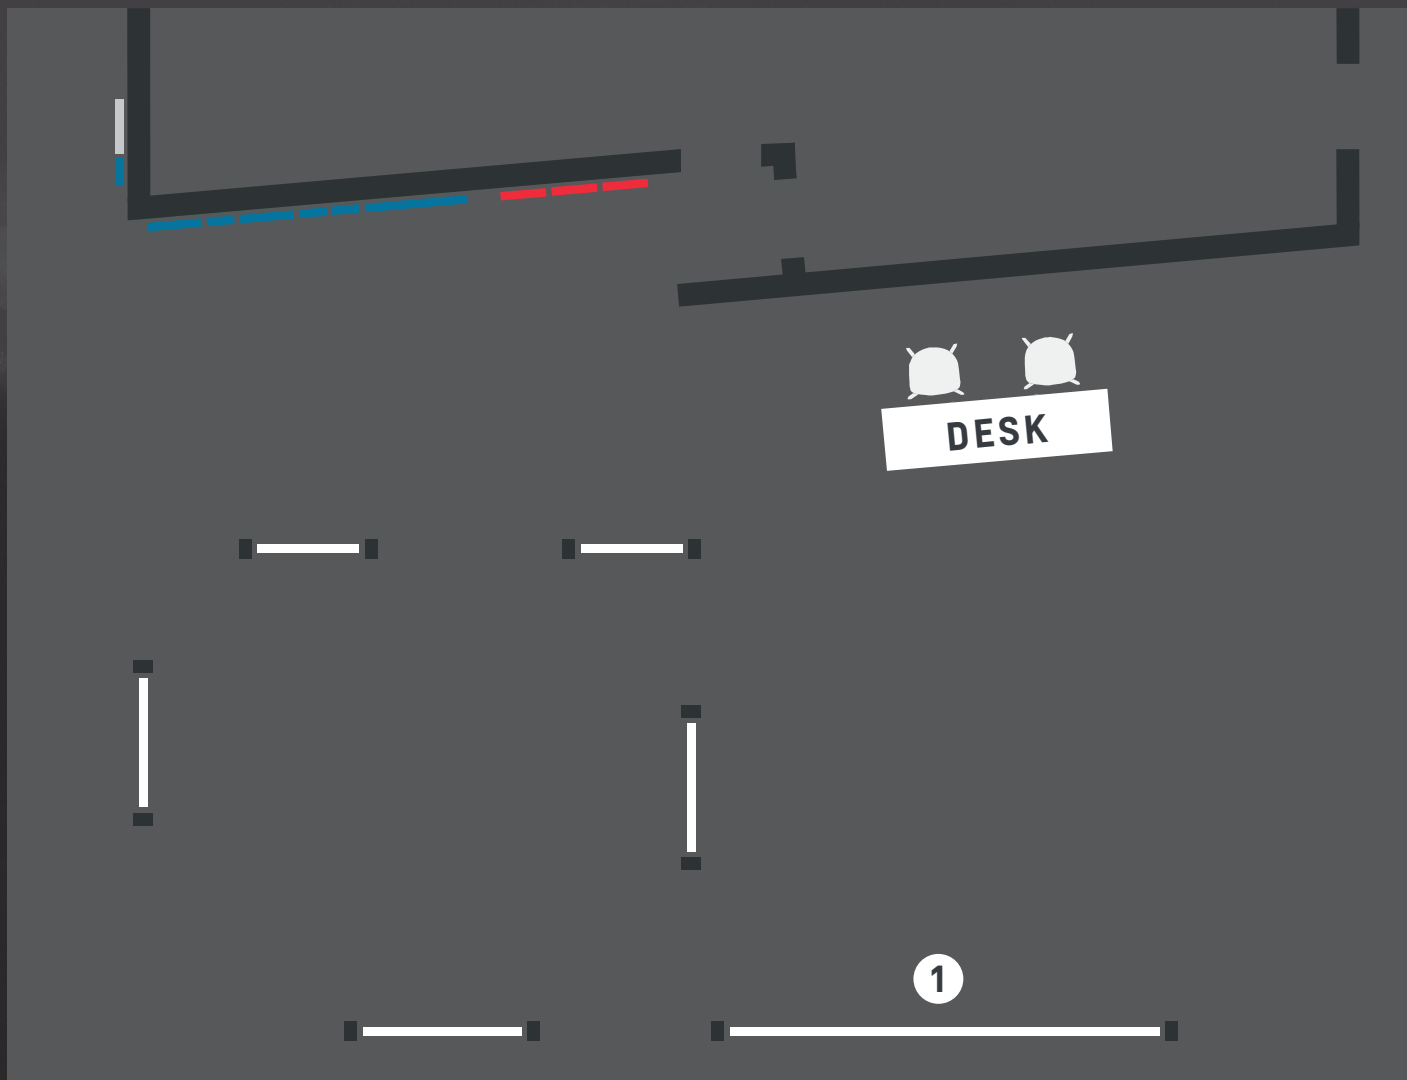

HI-ZENITH

ALIGNED SASHES PULL&SLIDE SYSTEM

- Minimal aesthetic
- Load capacity up to 400 kg
- Concealable frame with low threshold
- New generation rollers
- Fully anodized diverters with stainless steel guide
- High performance with central gasket and perimeter closure
- Micro-ventilation available
- Anti-burglar hardware compatible

NP ULTRA

MINIMAL HANDLE

- Aluminium
- No milling in tubularity for ultra-slim profiles
- 2 designs available by Marc Sadler
- Easy machining
- Faster assembly than traditional handle
- Fixed directly on the profile
- Customizable design

Q-LON

POLYURETHANE FOAM SEAL

- Low compression force required
- Excellent recovery after compression
- Unrivalled thermal performance
- Wide working temperature range
- Outstanding acoustic performance
- Paint and stain proof
- Wide range of colours
- Cradle to Cradle Certified® level Bronze

PROJECT SMART CHIC

CONCEALED MOTORISED TILT-AND-TURN SOLUTION

- Concealed actuator for minimal profiles
- For Euro groove
- Perfect integration in C.H.I.C. hardware
- Only one actuator for close and lock functions
- Quick set-and-test via installer app
- Smart home and smart building ready

CHIC 150


CONCEALED HINGE FOR WINDOW

- Concealed
- For Euro groove
- Load capacity up to 150 kg
- 180° opening
- For both side-hung and tilt-and-turn window
- 3D adjustments
- Micro-ventilation
- Top corrosion resistance (EN 1670 - Grade 5 certification in progress)

Q-LON

POLYURETHANE FOAM SEAL

- Low compression force required
- Excellent recovery after compression
- Unrivalled thermal performance
- Wide working temperature range
- Outstanding acoustic performance
- Paint and stain proof
- Wide range of colours
- Cradle to Cradle Certified® level Bronze

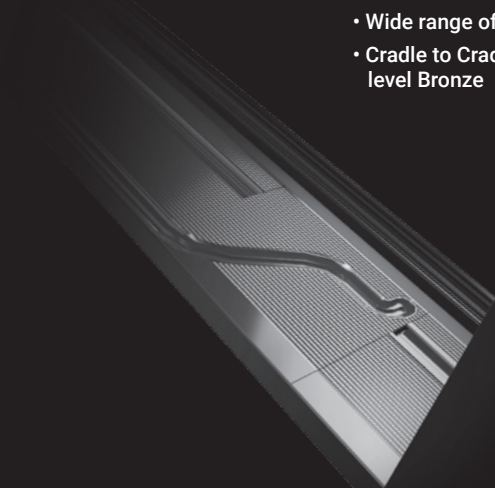

CHIC 200

CONCEALED HINGE FOR WINDOW

- Concealed
- For Euro groove
- Load capacity up to 200 kg
- 105° opening
- For both side-hung and tilt-and-turn window
- 3D adjustments
- Micro-ventilation
- Top corrosion resistance (EN 1670 - Grade 5 certification in progress)

SUPRA7 KORA

WINDOW HANDLE WITHOUT BASE

- Aluminium
- 4 designs available
- Fast and easy assembly
- Universal because it is compatible with 7 mm drive gear
- Wide range of finishes

Q-LON

POLYURETHANE FOAM SEAL

- Low compression force required
- Excellent recovery after compression
- Unrivalled thermal performance
- Wide working temperature range
- Outstanding acoustic performance
- Paint and stain proof
- Wide range of colours
- Cradle to Cradle Certified® level Bronze

NEX-TP

100% RECYCLABLE THERMOPLASTIC CENTRAL GASKET

- 100% recyclable
- Improved aesthetic with 45° cuts hidden in the corners
- Quick to install
- Better performance than EPDM
- Fully customizable by geometry and colour
- Accurate design shape
- Reduced tolerance

CHIC DOOR ALU16

CONCEALED HINGE FOR DOOR

- Concealed
- For Alu16 groove profiles
- Load capacity up to 150 kg
- 105° opening
- Single-operator 2D adjustments
- EN 1935:2004 (class 13 - 200,000 cycles)

Q-LON

POLYURETHANE FOAM SEAL

- Low compression force required
- Excellent recovery after compression
- Unrivalled thermal performance
- Wide working temperature range
- Outstanding acoustic performance
- Paint and stain proof
- Wide range of colours
- Cradle to Cradle Certified® level Bronze

FRANKFURT 30 D30MD

PULL HANDLE

- Stainless steel - Matt black RAL 9005
- Customisable by section, length and centre distance
- Top corrosion resistance finishes (EN 1670 - Grade 5)

TOLEDO L14

DOOR HANDLE

- Stainless steel - Matt black RAL 9005
- Top corrosion resistance finishes (EN 1670 - Grade 5)



PROXIMA

HIGH PERFORMANCE SLIM HINGE FOR DOOR

- Slim aesthetic (18 mm diameter)
- For Euro groove and R groove profiles
- Load capacity up to 160 kg
- 180° opening
- Single-operator 3D adjustments
- Patented side adjustment
- EN 1935:2004 (class 13 - 200,000 cycles)

Schlegel

Q-LON

POLYURETHANE FOAM SEAL

- Low compression force required
- Excellent recovery after compression
- Unrivalled thermal performance
- Wide working temperature range
- Outstanding acoustic performance
- Paint and stain proof
- Wide range of colours
- Cradle to Cradle Certified® level Bronze

REGUITTIinox

TORONTO 25 3Q5MD

PULL HANDLE

- Stainless steel - Matt black RAL 9005
- Customisable by section, length and centre distance
- Top corrosion resistance finishes (EN 1670 - Grade 5)

REGUITTIinox

KYOTO Q18

DOOR HANDLE

- Stainless steel - Matt black RAL 9005
- Top corrosion resistance finishes (EN 1670 - Grade 5)

CHIC DOOR 200 180°

180° OPENING CONCEALED HINGE FOR DOOR

- Concealed
- For profiles without channel
- Load capacity up to 250 kg
- 180° opening
- 3D adjustments

Schlegel

Q-LON

POLYURETHANE FOAM SEAL

- Low compression force required
- Excellent recovery after compression
- Unrivalled thermal performance
- Wide working temperature range
- Outstanding acoustic performance
- Paint and stain proof
- Wide range of colours
- Cradle to Cradle Certified® level Bronze

REGUITTIinox

LIVERPOOL 615MD

PULL HANDLE

- Stainless steel - Matt black RAL 9005
- Customisable by section, length and centre distance
- Top corrosion resistance finishes (EN 1670 - Grade 5)

REGUITTI

Q-MINI 142

DOOR HANDLE

- Matt black RAL 9005
- Top corrosion resistance finishes (EN 1670 - Grade 5)

